TERES IP66 PRO

ID 14

TERES IP66 PRO

TERES IP66 PRO PAN

TERES IP66 PRO POLE

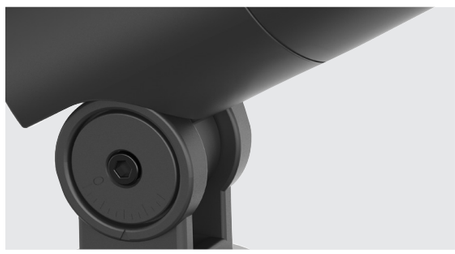

CE | D | RETILAP | 5 YEARS WARRANTY

IP 66 | CRI>90 | Mac Adams 3

IK 08 | RG0/RG1 | L90/B10 50.000h

-20° +45° | corrosion proof C4-L

Body

Epoxy powder coated aluminium

TERES IP66 PRO / MINI

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC9K315MN66	830	9W 15°	60
14PC9K324MN66	830	9W 24°	60
14PC9K336MN66	830	9W 36°	60
14PC9K350MN66	830	9W 50°	60

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66	130	2W 4°	60

TERES IP66 PRO / SMALL

Polycarbonate lens: 15°–24°–36°–50°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC18K315S66	1550	18W 15°	80
14PC18K324S66	1550	18W 24°	80
14PC18K336S66	1550	18W 36°	80
14PC18K350S66	1550	18W 50°	80

CE | D | RETILAP | 5 YEARS WARRANTY

IP 66 | CRI>90 | Mac Adams 3

IK 08 | RG0/RG1 | L90/B10 50.000h

-20° +45° | corrosion proof C4-L

On req.:

CODE K27 2700K | CODE K5 5000K | CODE K65 6500K

Body

Epoxy powder coated aluminium

Colours

COD.BK | ON REQ.

TERES IP66 PRO / MEDIUM

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC24K315M66	2640	24W 15°	105
14PC24K324M66	2640	24W 24°	105
14PC24K336M66	2640	24W 36°	105
14PC24K350M66	2640	24W 50°	105

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66	380	6W 4°	105

TERES IP66 PRO / PAN SMALL

Polycarbonate lens: 15°–24°–36°–50°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC18K315S66G	1550	18W 15°	80
14PC18K324S66G	1550	18W 24°	80
14PC18K336S66G	1550	18W 36°	80
14PC18K350S66G	1550	18W 50°	80

TERES IP66 PRO / PAN MINI

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC9K315MN66G	830	9W 15°	60
14PC9K324MN66G	830	9W 24°	60
14PC9K336MN66G	830	9W 36°	60
14PC9K350MN66G	830	9W 50°	60

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66G	130	2W 4°	60

TERES IP66 PRO / PAN MEDIUM

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.



CCT. 3000K	lm	Led	Ømm
14PC24K315M66G	2640	24W 15°	105
14PC24K324M66G	2640	24W 24°	105
14PC24K336M66G	2640	24W 36°	105
14PC24K350M66G	2640	24W 50°	105

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66G	380	6W 4°	105

CE | D | RETILAP | 5 YEARS WARRANTY

IP 66 | CRI>90 | Mac Adams 3 | IK 08 | RG0/RG1 | L90/B10 50.000h | -20° +45° | corrosion proof C4-L

On req.: CODE K27 2700K | CODE K5 5000K | CODE K65 6500K

Body: Epoxy powder coated aluminium

Colours: COD.BK | ON REQ.

CE | D | RETILAP | 5 YEARS WARRANTY

IP 66 | CRI>90 | Mac Adams 3 | IK 08 | RG0/RG1 | L90/B10 50.000h | -20° +45° | corrosion proof C4-L

On req.: CODE K27 2700K | CODE K5 5000K | CODE K65 6500K

Body: Epoxy powder coated aluminium

Colours: COD.BK | ON REQ.

TERES IP66 PRO / POLE MINI

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.
Suitable for pole installation (80 mm ≤ Ø ≤ 120 mm).



CCT. 3000K	lm	Led	Ømm
14PC9K315MN66P	830	9W 15°	60
14PC9K324MN66P	830	9W 24°	60
14PC9K336MN66P	830	9W 36°	60
14PC9K350MN66P	830	9W 50°	60

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66P	130	2W 4°	60

TERES IP66 PRO / POLE SMALL

Polycarbonate lens: 15°–24°–36°–50°.
2000 mm cable with connector. Integrated driver.
Suitable for pole installation (80 mm ≤ Ø ≤ 120 mm).



CCT. 3000K	lm	Led	Ømm
14PC18K315S66P	1550	18W 15°	80
14PC18K324S66P	1550	18W 24°	80
14PC18K336S66P	1550	18W 36°	80
14PC18K350S66P	1550	18W 50°	80

CE | D | RETILAP | 5 YEARS WARRANTY

IP66 | CRI>90 | Mac Adams 3 | IK08 | RG0/RG1 | L90/B10 50.000h | -20° +45° | corrosion proof C4-L

On req.: CODE K27 2700K | CODE K5 5000K | CODE K65 6500K

Body Epoxy powder coated aluminium

Colours COD.BK | ON REQ.

TERES IP66 PRO / POLE MEDIUM

Polycarbonate lens: 15°–24°–36°–50° and HIGH NARROW BEAM 4°.
2000 mm cable with connector. Integrated driver.
Suitable for pole installation (80 mm ≤ Ø ≤ 120 mm).



CCT. 3000K	lm	Led	Ømm
14PC24K315M66P	2640	24W 15°	105
14PC24K324M66P	2640	24W 24°	105
14PC24K336M66P	2640	24W 36°	105
14PC24K350M66P	2640	24W 50°	105

HIGH NARROW BEAM 4° LENS VERSION

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66P	380	6W 4°	105

ACCESSORIES

Honeycomb optics.

14AAND66MN - MINI
14AAND66S - SMALL
14AAND66M- MEDIUM

Micro-engraved optics.

14AAVR66MN - MINI
14AAVR66S - SMALL
14AAVR66M- MEDIUM

Anti-glare filter.

14AAUGR66MN - MINI
14AAUGR66S - SMALL
14AAUGR66M- MEDIUM