

TERES IP66 PRO

ID 14



CE

RETI LAP

5 YEARS WARRANTY

IP 66

IK 08

-20°
+45°

CRI>90

RG0/RG1

corrosion proof C4-L

Mac Adams 3


L90/B10
50.000h

Corpo

Alluminio
verniciato a polveri
epossidiche

TERES IP66 PRO / MINI

Lente in policarbonato 15°-24°-36°-50° e HIGH NARROW BEAM 4°.
Cavo da 2000mm con connettore. Driver integrato.

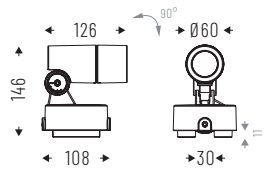

CCT. 3000K	lm	Led	Ømm
14PC9K315MN66	810	9W 15°	60
14PC9K324MN66	840	9W 24°	60
14PC9K336MN66	830	9W 36°	60
14PC9K350MN66	840	9W 50°	60


VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66	130	2W 4°	60



TERES IP66 PRO / SMALL

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.

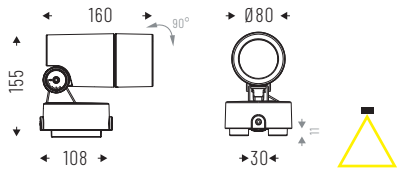

CCT. 3000K	lm	Led	Ømm
14PC18K315S66	1390	18W 15°	80
14PC18K324S66	1630	18W 24°	80
14PC18K336S66	1640	18W 36°	80
14PC18K350S66	1550	18W 50°	80



CE

RETI LAP

5 YEARS WARRANTY

IP 66

IK 08

-20°
+45°

CRI>90

RG0/RG1

corrosion proof C4-L

Mac Adams 3

L90/B10
50.000h

On req.:

CODE K27
2700K

CODE K5
5000K

CODE K65
6500K

Corpo

Alluminio
verniciato a polveri
epossidiche


Cromie

COD. BK

ONREQ.

TERES IP66 PRO / MEDIUM

Lente in policarbonato 15°-24°-36°-50° e HIGH NARROW BEAM 4°.
Cavo da 2000mm con connettore. Driver integrato.

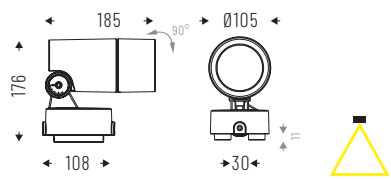

CCT. 3000K	lm	Led	Ømm
14PC24K315M66	2640	24W 15°	105
14PC24K324M66	2640	24W 24°	105
14PC24K336M66	2640	24W 36°	105
14PC24K350M66	2640	24W 50°	105


VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66	380	6W 4°	105



TERES IP66 PRO / PAN MINI

Lente in policarbonato 15°-24°-36°-50° e HIGH NARROW BEAM 4°.
Cavo da 2000mm con connettore. Driver integrato.

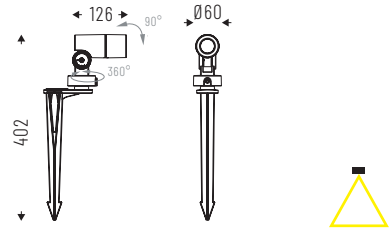

CCT. 3000K	lm	Led	Ømm
14PC9K315MN66G	810	9W 15°	60
14PC9K324MN66G	840	9W 24°	60
14PC9K336MN66G	830	9W 36°	60
14PC9K350MN66G	840	9W 50°	60

VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66G	130	2W 4°	60



CE

RETI LAP

5 YEARS WARRANTY

IP66

CRI>90

Mac Adams 3

IK 08

RG0/RG1

L90/B10 50.000h

-20°

+45°

corrosion proof C4-L

On req.:

CODE K27 2700K

CODE K5 5000K

CODE K65 6500K

Corpo

Cromie


Alluminio verniciato a polveri epossidiche

COD. BK

ON REQ.

TERES IP66 PRO / PAN SMALL

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.

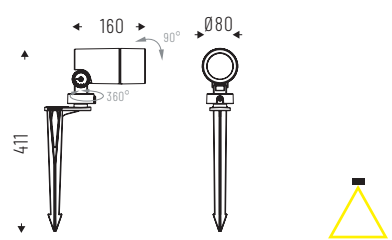


CCT. 3000K	lm	Led	Ømm
14PC18K315S66G	1390	18W 15°	80
14PC18K324S66G	1390	18W 24°	80
14PC18K336S66G	1390	18W 36°	80
14PC18K350S66G	1390	18W 50°	80



TERES IP66 PRO / PAN MEDIUM

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.

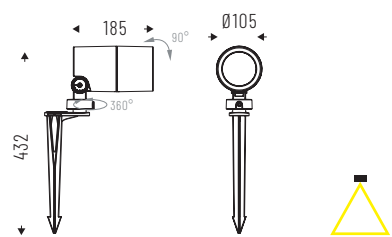

CCT. 3000K	lm	Led	Ømm
14PC24K315M66G	2640	24W 15°	105
14PC24K324M66G	2640	24W 24°	105
14PC24K336M66G	2640	24W 36°	105
14PC24K350M66G	2640	24W 50°	105

VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66G	380	6W 4°	105



CE

RETI LAP

5 YEARS WARRANTY

IP66

CRI>90

Mac Adams 3

IK 08

RG0/RG1

L90/B10 50.000h

-20°

+45°

corrosion proof C4-L

On req.:

CODE K27 2700K

CODE K5 5000K

CODE K65 6500K

Corpo

Cromie


Alluminio verniciato a polveri epossidiche

COD. BK

ON REQ.

TERES IP66 PRO / POLE MINI

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.



CCT. 3000K	lm	Led	Ømm
14PC9K315MN66P	810	9W 15°	60
14PC9K324MN66P	840	9W 24°	60
14PC9K336MN66P	830	9W 36°	60
14PC9K350MN66P	840	9W 50°	60


VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB2K3MN66P	130	2W 4°	60



TERES IP66 PRO / POLE MEDIUM

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.

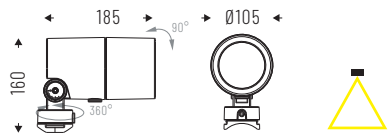

CCT. 3000K	lm	Led	Ømm
14PC24K315M66P	2640	24W 15°	105
14PC24K324M66P	2640	24W 24°	105
14PC24K336M66P	2640	24W 36°	105
14PC24K350M66P	2640	24W 50°	105


VERSIONE CON LENTE HIGH NARROW BEAM 4°

CCT. 3000K	lm	Led	Ømm
14HNB6K3M66P	380	6W 4°	105



TERES IP66 PRO / POLE SMALL

Lente in policarbonato 15°-24°-36°-50°.
Cavo da 2000mm con connettore. Driver integrato.

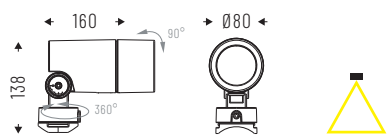

CCT. 3000K	lm	Led	Ømm
14PC18K315S66P	1390	18W 15°	80
14PC18K324S66P	1630	18W 24°	80
14PC18K336S66P	1640	18W 36°	80
14PC18K350S66P	1550	18W 50°	80



ACCESSORI



Ottica a nido d'ape.

14AAND66MN - MINI
14AAND66S - SMALL
14AAND66M - MEDIUM



Ottica vetro microrigata.

14AAVR66MN - MINI
14AAVR66S - SMALL
14AAVR66M - MEDIUM



Ghiera Anti-Glare
filtro anti abbagliamento.

14AAUGR66MN - MINI
14AAUGR66S - SMALL
14AAUGR66M - MEDIUM

CE

RETI LAP

5 YEARS WARRANTY

IP66

CRI>90

Mac Adams 3

IK 08

RG0/RG1

L90/B10 50.000h

-20° +45°

corrosion proof C4-L

On req.:

CODE K27 2700K

CODE K5 5000K

CODE K65 6500K

Corpo

Alluminio verniciato a polveri epossidiche

Cromie

COD. BK

ON REQ.