







FEATURES

-  Adjustable emission
-  UGR <22
-  IP66
-  IK 06
-  -20°C +40°C


LED

-  3000K
-  >108 lm/W; >120 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  2700K - code K27*
- 4000K - code K4*
- 5000K - code K5*

SPECIFICATIONS

Built-in driver.
Internal aluminum reflectors,
beam angles: 10° - 20° - 40° - 50° - 70°.

BODY

Aluminum with epoxy
powder coating.

COLORS

White RAL 9003 wrinkled
- code W
Black RAL 9005 wrinkled
- code BK
Anthracite grey - code GA
Corten Bronze - code BC

RELATED PRODUCTS

Teres (P. 188)
Teres Exte (P. 195)
Teres Micro Zoom (P. 213)
Teres LV (P. 215)



Perfectly complementing the already extensive TERES interiors collection, **TERES IP66** high ingress protection rating makes it **perfect for outdoor environment**, gardens, planters and **accent lighting for signs and architecture**. The **built-in driver** and the dedicated connection compartment ensure the product is easy to install. The range of beam angles and graduated pointing system is designed for **easy and precise focusing**. The product can either be mounted directly on surfaces or attached to a spike mount, for a more flexible ground installation.

ID 14





TERES IP66 SMALL

Accessories on page 19.

IP 66 **IK06**

Internal aluminum reflectors.
Beam angles: 10° - 20° - 40° - 50°.




Cod. 3000K		lm	Ø mm
14VT18K310S66	18W 10°	1945	80
14VT18K320S66	18W 20°	1945	80
14VT18K340S66	18W 40°	1945	80
14VT18K350S66	18W 50°	1945	80


TERES IP66 MEDIUM

Accessories on page 19.

IP 66 **IK06**

Internal aluminum reflectors.
Beam angles: 10° - 20° - 40° - 70°.



Cod. 3000K		lm	Ø mm
14VT31K310M66	31W 10°	3286	80
14VT31K320M66	31W 20°	3286	80
14VT31K340M66	31W 40°	3286	80
14VT31K370M66	31W 70°	3286	80

ACCESSORIES



TERES IP66 SMALL
Ground installation spike.

14AA21S



TERES IP66 SMALL
Adapter with belt
for tree mount.

14AA18S



TERES IP66 SMALL
Wall arm connection,
length 700mm.

14AA15S



TERES IP66 MEDIUM
Ground installation spike.

14AA21M



TERES IP66 MEDIUM
Adapter with belt
for tree mount.

14AA18M



TERES IP66 MEDIUM
Wall arm connection,
length 700mm.

14AA15M


TECHNICAL NOTES



Graduated adjustment.



Osmotic valve.

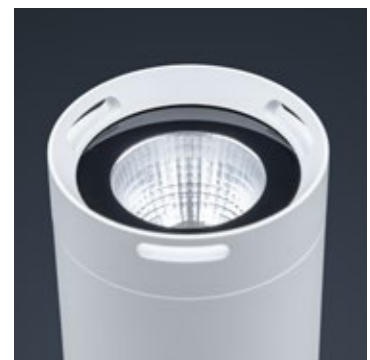

Holes for the rainwater drainage.