










FEATURES

-  Direct emission
-  UGR <19
-  IP40




LED

-  3000K/4000K
-  >80 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D
-  Bluetooth - code BT*
-  2700K - code K27*

SPECIFICATIONS

Built-in driver.
48V DC operation.
Lens with adjustable
beam, from 10° to 40°.
Honeycomb optic.

BODY

Die-cast aluminum with
epoxy powder coating.

COLORS

White RAL 9003 wrinkled
- code W
Black RAL 9005 wrinkled
- code BK

RELATED PRODUCTS

Teres (P. 188)
Teres Exte (P. 195)
Teres IP66 (P. 309)

* Where available
For SWITCHDIM command use DIMTDS (pg. 337)



TERES MICRO ZOOM

TERES also takes up space in the world of Low Voltage and integrates the **MICRO ZOOM** version with adjustable beam lens. The result is a spot with **extremely contained dimensions**: with a diameter of 31 mm, **powered at 48V**, it is ideal for accent lighting in prestigious environments.

ID 14




esse-ci

TERES MICRO ZOOM 1X

IP 40

Lens with adjustable beam from 10° to 40°.

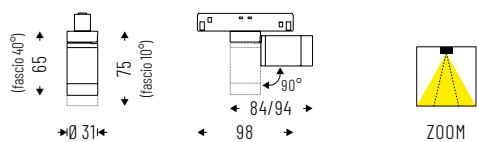

Cod. 4000K	Icon	lm	Ø mm
14ZM3K4NLV	1X3W	262	31
14ZM7K4NLV	1X7W	560	31




Cod. 3000K	Icon	lm	Ø mm
14ZM3K3NLV	1X3W	238	31
14ZM7K3NLV	1X7W	510	31

TERES MICRO ZOOM 2X

IP 40

Lens with adjustable beam from 10° to 40°.

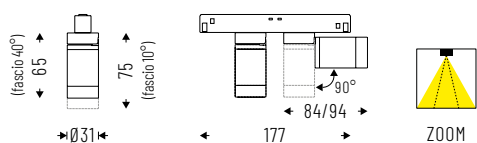

Cod. 4000K	Icon	lm	Ø mm
14ZM23K4NLV	2X3W	524	31
14ZM27K4NLV	2X7W	1120	31



Cod. 3000K	Icon	lm	Ø mm
14ZM23K3NLV	2X3W	476	31
14ZM27K3NLV	2X7W	1020	31