UPLIK

ID 76






UPLIK



UPLIK FLOOR



UPLIK FLOOR TWIN

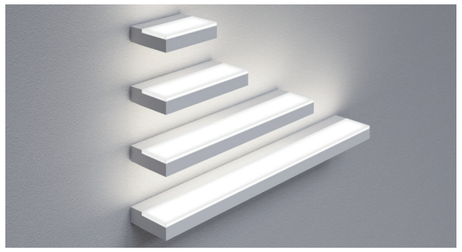

CE · C LP-NP · D XP · 5 YEARS WARRANTY · RETILAP

IP 40 · -20° +35° · CRI>90 · MacAdam 3 · RG0/RG1 · L90/B10 50.000h


Body

Epoxy
powder coated
aluminium

UPLIK / WALL MINI

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.





CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DR12K4	1490	76DR12K3	1415	12W	175

UPLIK / WALL MINI DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22. Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.






CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI12K4	1562	76DI12K3	1483	12W	175

UPLIK / WALL SMALL

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.





CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DR24K4HPS	3006	76DR24K3HPS	2855	24W	315
76DR48K4XPS	4887	76DR48K3XPS	4642	48W	315

CE · C LP-NP · D XP · 5 YEARS WARRANTY · RETILAP

IP 40 · -20° +35° · CRI>90 · MacAdam 3 · RG0/RG1 · L90/B10 50.000h

On req.: DALI · CODE — D · 1 h EM · 1h DEM · 3 h EM · EM · DEM · EM3H · CODE K27 2700K · CODE K5 5000K

Body

Epoxy
powder coated
aluminium

Colours


COD.B

ON REQ.

UPLIK / WALL SMALL DOUBLE EMISSION



Lower methacrylate satin antistatic diffuser screen, UGR<22. Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.



CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI48K4XPS	5125	76DI48K3XPS	4868	48W	315

UPLIK / WALL MEDIUM

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.





CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DR24K4M	3173	76DR24K3M	3022	24W	590
76DR48K4HPM	6012	76DR48K3HPM	5711	48W	590
76DR62K4XPM	7019	76DR62K3XPM	6668	62W	590
76DR96K4XPM	10568	76DR96K3XPM	10039	96W	590

UPLIK / WALL MEDIUM DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22. Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.





CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI62K4XPM	7358	76DI62K3XPM	7008	62W	590
76DI96K4XPM	10990	76DI96K3XPM	10441	96W	590

IP 40 · CRI>90 · MacAdam 3 · 5 YEARS WARRANTY · RETILAP · -20° +35° · RG0/RG1 · L90/B10 50.000h

On req.: DALI CODE — D · 1h EM · 1h DEM · 3h EM · EM3H · CODE K27 2700K · CODE K5 5000K

Body: Epoxy powder coated aluminium

Colours: COD.B · ON REQ.

UPLIK / WALL LONG

Methacrylate satin antistatic diffuser screen, UGR<22.
Indirect Light Control (ILC) technology for partially indirect emission.





CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DR36K4L	4710	76DR36K3L	4478	36W	870
76DR72K4HPL	9018	76DR72K3HPL	8567	72W	870

UPLIK / WALL LONG DOUBLE EMISSION

Lower methacrylate satin antistatic diffuser screen, UGR<22. Indirect Light Control (ILC) technology and upper PG protective diffuser for dual emission: direct/indirect.






CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI93K4XPL	10996	76DI93K3XPL	10424	93W	870
76DI144K4XPL	16187	76DI144K3XPL	15345	144W	870

UPLIK / FLOOR

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.



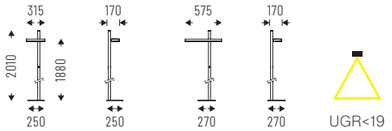

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DPL48K4D	4642	76DPL48K3D	4400	48W	315
76DPL96K4D	10093	76DPL96K3D	9517	96W	575

IP 40 · CRI>90 · MacAdam 3 · 5 YEARS WARRANTY · RETILAP · -20° +35° · RG0/RG1 · L90/B10 50.000h

On req.: DALI CODE — D · 1h EM · 1h DEM · 3h EM · EM3H · CODE K27 2700K · CODE K5 5000K


Body: Epoxy powder coated aluminium

Colours: COD.B · ON REQ.

UPLIK / FLOOR DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.



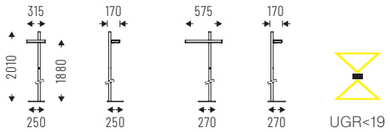


CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI48DPLK4D	4868	76DI48DPLK3D	4615	48W	315
76DI96DPLK4D	10440	76DI96DPLK3D	9897	96W	575

UPLIK / FLOOR TWIN

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.



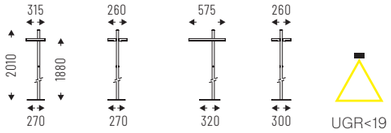

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DPL96K4TD	9284	76DPL96K3TD	8800	96W	315
76DPL192K4TD	20186	76DPL192K3TD	19034	192W	575

CE · C LP-NP · D XP · 5 YEARS WARRANTY · RETILAP

IP 40 · -20° +35° · CRI>90 · RG0/RG1 · MacAdam 3 · L90/B10 50.000h

On req.: DALI CODE — D · 1 h EM · 1h DEM · 3 h EM EM3H · CODE K27 2700K · CODE K5 5000K


Body: Epoxy powder coated aluminium

Colours: COD.B · + ON REQ.

UPLIK / FLOOR TWIN DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.



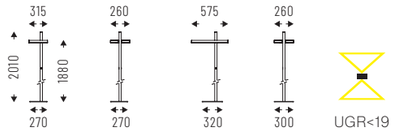


CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DI96DPLK4TD	9736	76DI96DPLK3TD	9230	96W	315
76DI192DPLK4TD	20880	76DI192DPLK3TD	19794	192W	575

UPLIK / FLOOR TWIN INTELLIGENT

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission.



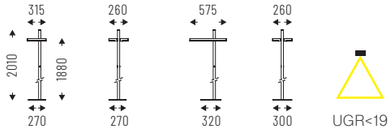

CCT. 4000K	lm	CCT. 3000K	lm	Led	Lmm
76DPL96K4TI	9284	76DPL96K3TI	8800	96W	315
76DPL192K4TI	20186	76DPL192K3TI	19034	192W	575

For the system setup, at least one DIMxxxPROG is required.

CE · C LP-NP · D XP · 5 YEARS WARRANTY · RETILAP

IP 40 · -20° +35° · CRI>90 · RG0/RG1 · MacAdam 3 · L90/B10 50.000h

On req.: DALI CODE — D · 1 h EM · 1h DEM · 3 h EM EM3H · CODE K27 2700K · CODE K5 5000K


Body: Epoxy powder coated aluminium

Colours: COD.B · + ON REQ.

UPLIK/ FLOOR TWIN INTELLIGENT DOUBLE EMISSION

Lower diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment. Indirect Light Control (ILC) technology for partially indirect emission. Upper PG protective diffuser for dual emission: direct/indirect.



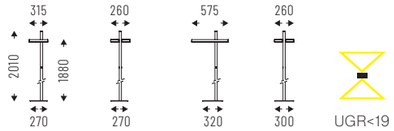

CCT. 4000K	lm
76DI96DPLK4TI	9736
76DI192DPLK4TI	20880

CCT. 3000K	lm
76DI96DPLK3TI	9230
76DI192DPLK3TI	19794

Led	Lmm
96W	315
192W	575

For the system setup, at least one DIMxxxPROG is required.

CE · C LP-HP · D XP · 5 YEARS WARRANTY · RETILAP

IP 40 · -20° +35° · CRI>90 · RG0/RG1 · MacAdam 3 · L90/B10 50.000h

On req.: DALI CODE — D · 1 h EM EM · 1h DEM DEM · 3 h EM EM3H · CODE K27 2700K · CODE K5 5000K

Body

Epoxy powder coated aluminium

Colours

COD.B

ON REQ.

