



/ 5 4 2

VECTOR

5 4 3 /

# VECTOR

Design ESSE-CI





**η** >144 lm/W; >153 lm/W

**CRI** >80

**IP** 40

**UGR** <22

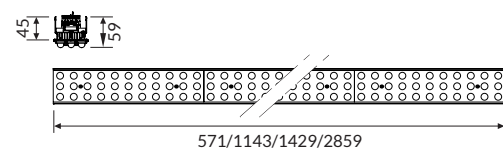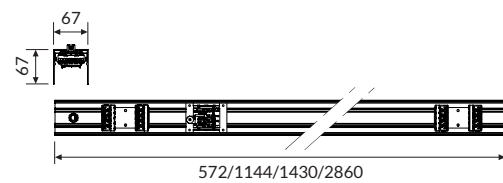




/ 5 4 4

# VECTOR

5 4 5 /

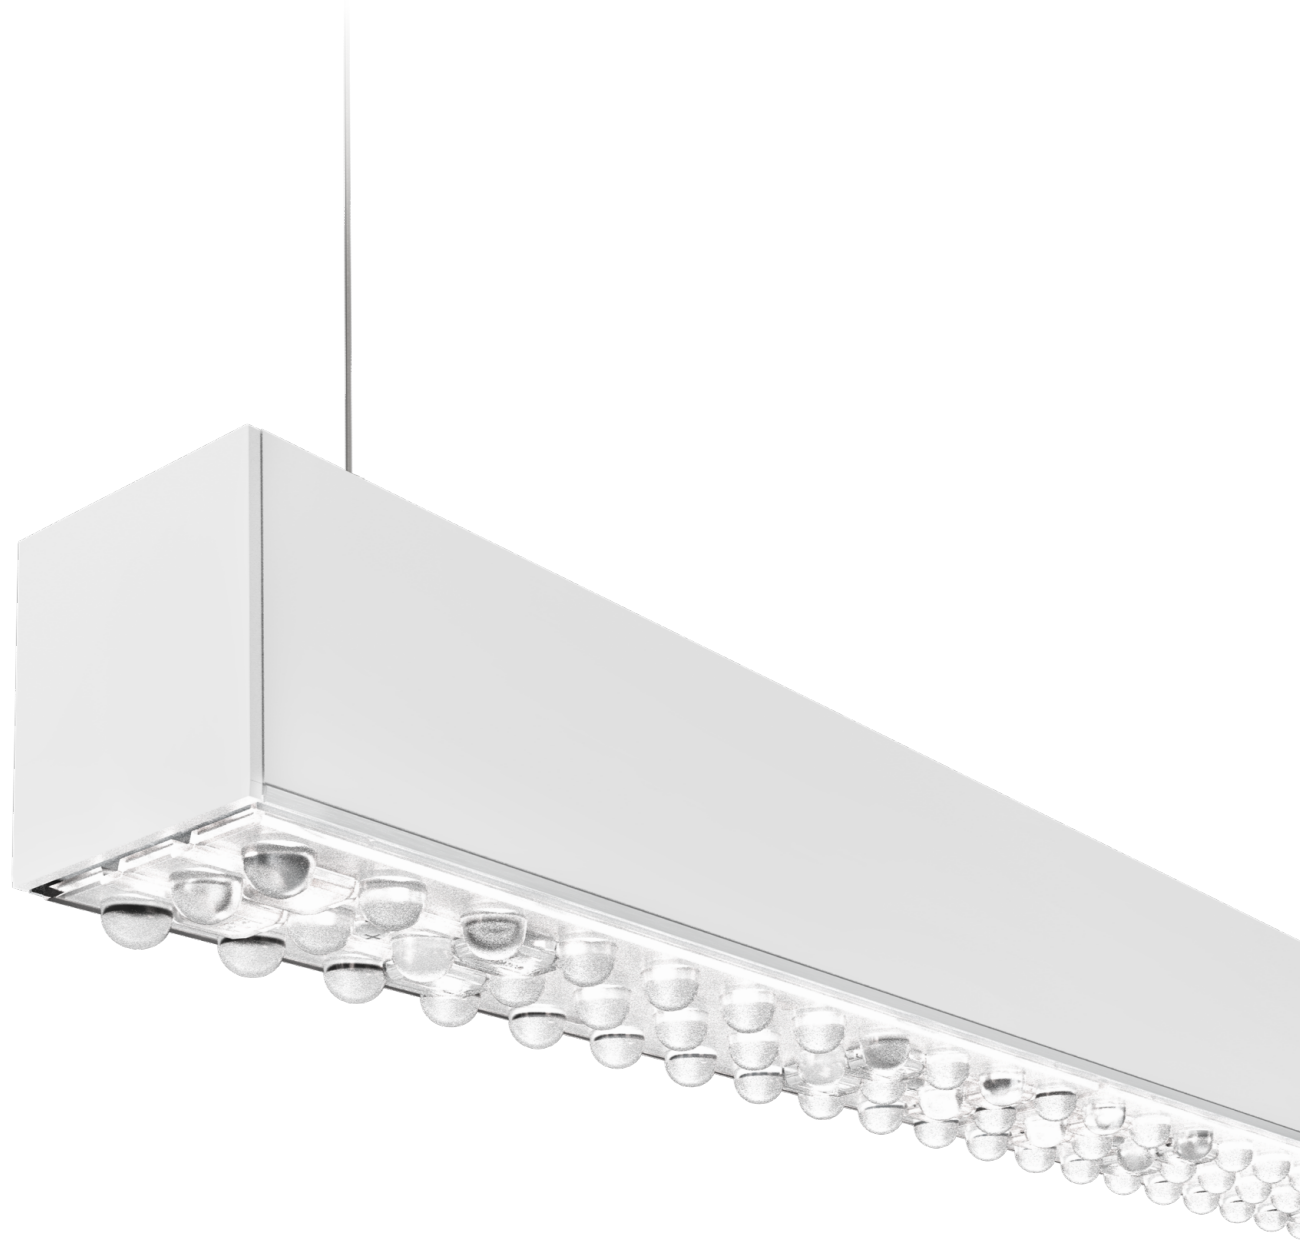

# VECTOR

VECTOR is a system designed for the lighting of commercial spaces aimed at exposure and sales. Thanks to the structured wiring and to the multiple lenses, exceeds any installation limit reaching the maximum of the lighting results and of energy saving.

## SPECIFICATIONS

- Integrated driver
- Colour temperature: 3000K/4000K
- CRI>80
- McAdams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## OPTICS

- PMMA lens for concentrating emission
- PMMA lens for diffused emission
- PMMA lens for double asymmetrical emission

## BODY

Manufactured in extruded aluminum with epoxy powder coating.

## LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## CERTIFICATIONS

CE IP40  
ErP Class: A+

## COLOURS

White RAL 9003 - Code: B  
Black RAL 9005 - Code: C8

## ON REQUEST


- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Driver Bluetooth - Code: BT (verify the version available)

## VERSIONS

VECTOR PROFILE  
VECTOR PC  
VECTOR DS


VECTOR DAS  
ACCESSORIES






/ 5 4 6

# VECTOR PROFILE

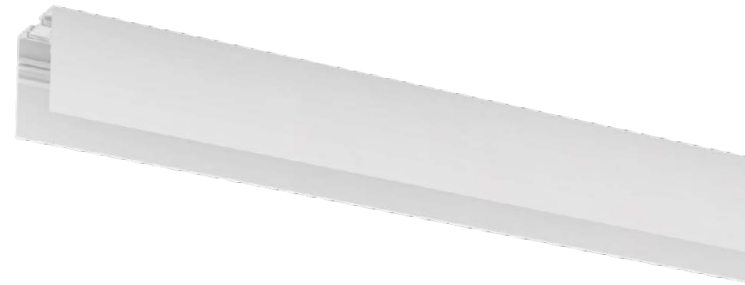


Prewired aluminium body 7x2,5 mm<sup>2</sup>.

IP 20

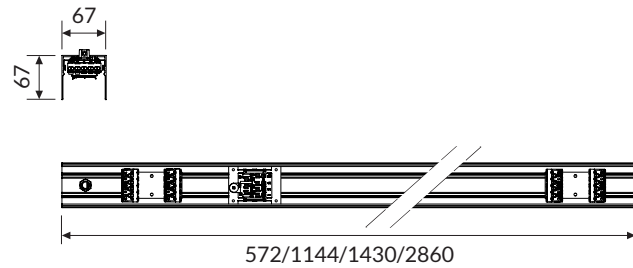

COD	mm
84AA572	572
84AA1144	1144
84AA1430	1430
84AA2860	2860




# VECTOR PC



## OPTIC

PMMA lens for concentrating emission 30°.

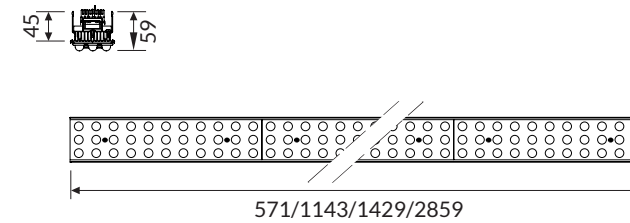


## COLOUR TEMPERATURE //

### 4 0 0 0 K

COD	💡	lm	mm
84PC17L4	17W 4000K	2609	571
84PC24L4	24W 4000K	3608	571
84PC32L4	32W 4000K	5217	1143
84PC45L4	45W 4000K	7215	1143
84PC40L4	40W 4000K	6521	1429
84PC56L4	56W 4000K	9019	1429
84PC77L4	77W 4000K	13043	2859
84PC107L4	107W 4000K	18038	2859

IP 40 **A+**

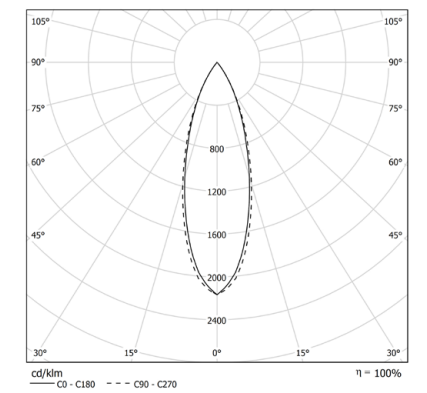

### 3 0 0 0 K

COD	💡	lm	mm
84PC17L3	17W 3000K	2516	571
84PC24L3	24W 3000K	3460	571
84PC32L3	32W 3000K	5032	1143
84PC45L3	45W 3000K	6919	1143
84PC40L3	40W 3000K	6290	1429
84PC56L3	56W 3000K	8649	1429
84PC77L3	77W 3000K	12580	2859
84PC107L3	107W 3000K	17298	2859

# VECTOR

5 4 7 /





/ 5 4 8

# VECTOR DS




## OPTIC

PMMA lens for diffused emission.



IP 40 A+

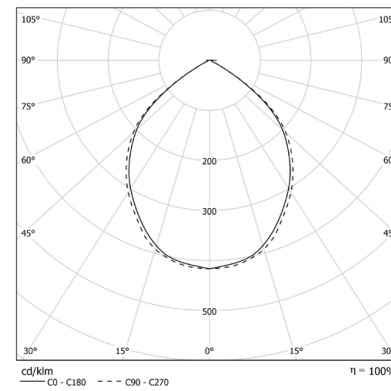

## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
84DS17L4	17W 4000K	2538	571
84DS24L4	24W 4000K	3510	571
84DS32L4	32W 4000K	5076	1143
84DS45L4	45W 4000K	7020	1143
84DS40L4	40W 4000K	6345	1429
84DS56L4	56W 4000K	8775	1429
84DS77L4	77W 4000K	12690	2859
84DS107L4	107W 4000K	17550	2859

3 0 0 0 K

COD		lm	mm
84DS17L3	17W 3000K	2448	571
84DS24L3	24W 3000K	3366	571
84DS32L3	32W 3000K	4896	1143
84DS45L3	45W 3000K	6732	1143
84DS40L3	40W 3000K	6120	1429
84DS56L3	56W 3000K	8415	1429
84DS77L3	77W 3000K	12240	2859
84DS107L3	107W 3000K	16830	2859





5 4 9 /

# VECTOR DAS




## OPTIC

PMMA lens for double asymmetrical emission.



IP 40 A+

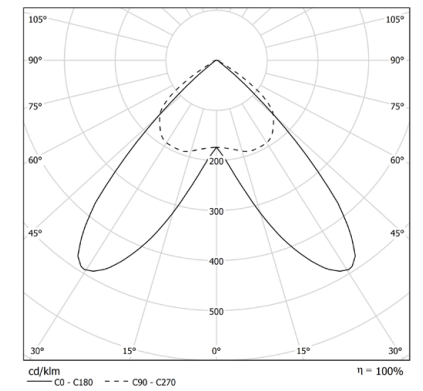

## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
84DAS17L4	17W 4000K	2453	571
84DAS24L4	24W 4000K	3393	571
84DAS32L4	32W 4000K	4907	1143
84DAS45L4	45W 4000K	6786	1143
84DAS40L4	40W 4000K	6134	1429
84DAS56L4	56W 4000K	8483	1429
84DAS77L4	77W 4000K	12267	2859
84DAS107L4	107W 4000K	16965	2859

3 0 0 0 K

COD		lm	mm
84DAS17L3	17W 3000K	2366	571
84DAS24L3	24W 3000K	3254	571
84DAS32L3	32W 3000K	4733	1143
84DAS45L3	45W 3000K	6508	1143
84DAS40L3	40W 3000K	5916	1429
84DAS56L3	56W 3000K	8135	1429
84DAS77L3	77W 3000K	11832	2859
84DAS107L3	107W 3000K	16269	2859

ACCESSORIES



84AA09

End cap kit.



84AA13

Single wire 1500mm long adjustable suspension kit.



84AA1330

Single wire 3000mm long adjustable suspension kit.



84AA11

Linear joint.



84AA165P

5 pole-powered supply box.  
Cable length 2000mm.



84AA167P

7 pole-powered supply box.  
Cable length 2000mm.

TECHNICAL NOTE

INSTALLATION

