

WALKABOUT

ID 93




WALKABOUT
NB / AS / WB / DAS



WALKABOUT GROUND
NB / AS / WB / DAS



WALKABOUT DK
& GROUND version

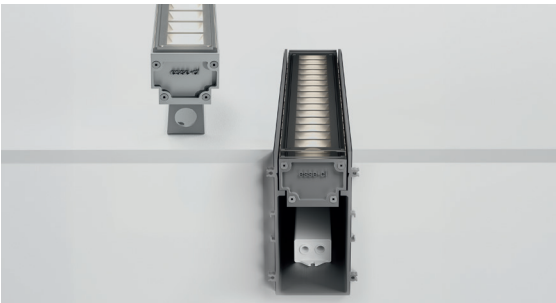

CE

REITAP

5 YEARS WARRANTY

IP 67

IK07/09

-20°
+55°

CRI>80

RG0/PG1

working load
max 1000 kg

MacAdam 3

L90/B10
50.000h

24 V


Body
Anodized
aluminium

WALKABOUT

For single installation, with adjustable support.



Remote driver as accessory.



NARROW BEAM OPTICS - NB			
CCT. 3000K	lm	Led	mm
93NB6K3	762	5.5W	276
93NB11K3	1525	11W	526
93NB22K3	3023	22W	1026
93NB33K3	4454	33W	1526

ASYMMETRIC OPTICS - AS			
CCT. 3000K	lm	Led	mm
93AS6K3	789	5.5W	276
93AS11K3	1579	11W	526
93AS22K3	2831	22W	1026
93AS33K3	4609	33W	1526

WIDE BEAM OPTICS - WB			
CCT. 3000K	lm	Led	mm
93WB6K3	780	5.5W	276
93WB11K3	1406	11W	526
93WB22K3	3094	22W	1026
93WB33K3	4558	33W	1526

DOUBLE ASYMMETRIC OPTIC - DAS			
CCT. 3000K	lm	Led	mm
93DAS6K3	771	5.5W	276
93DAS11K3	1543	11W	526
93DAS22K3	3059	22W	1026
93DAS33K3	4506	33W	1526

CE

REITAP

5 YEARS WARRANTY

IP 67

IK07

-20°
+55°

CRI>80

RG0/PG1

working load
max 1000 kg

MacAdam 3

L90/B10
50.000h

24 V

Onreq. CODE K4 4000K

RGB RGBW

Body

Anodized
aluminium

Colours

RAL 7035

WALKABOUT / FC

For continuous row installation* with adjustable support.



**Provide an element for single installation, with relative overall dimensions, at the end of the continuous row. Remote driver as accessory.*

NARROW BEAM OPTICS - NB			
CCT. 3000K	lm	Led	mm
93NB6K3FC	762	5.5W	276
93NB11K3FC	1525	11W	526
93NB22K3FC	3023	22W	1026
93NB33K3FC	4454	33W	1526

ASYMMETRIC OPTICS - AS			
CCT. 3000K	lm	Led	mm
93AS6K3FC	789	5.5W	276
93AS11K3FC	1579	11W	526
93AS22K3FC	2831	22W	1026
93AS33K3FC	4609	33W	1526

WIDE BEAM OPTICS - WB			
CCT. 3000K	lm	Led	mm
93WB6K3FC	780	5.5W	276
93WB11K3FC	1406	11W	526
93WB22K3FC	3094	22W	1026
93WB33K3FC	4558	33W	1526

DOUBLE ASYMMETRIC OPTIC - DAS			
CCT. 3000K	lm	Led	mm
93DAS6K3FC	771	5.5W	276
93DAS11K3FC	1543	11W	526
93DAS22K3FC	3059	22W	1026
93DAS33K3FC	4506	33W	1526

CE

RETI LAP

5 YEARS WARRANTY

IP 67

IK 07

-20°

+55°

CRI>80

RGV/RG1

working load max 1000 kg

MacAdam 3

L90/B10 50.000h

24 V

On req.:

CODE K4

4000K

RGB

RGBW

Body

Anodized aluminium



Colours

RAL 7035

WALKABOUT / GROUND

For single walk-over installation.

Recessed box included.

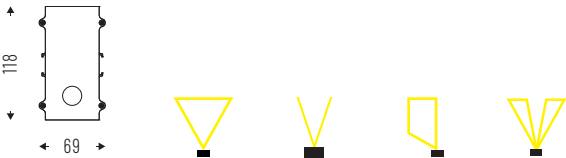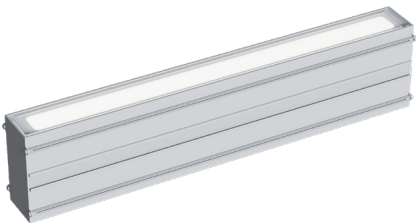

Remote driver as accessory.

NARROW BEAM OPTICS - NB			
CCT. 3000K	lm	Led	mm
93NB6K3G	762	5.5W	287
93NB11K3G	1525	11W	537
93NB22K3G	3023	22W	1037
93NB33K3G	4454	33W	1537

ASYMMETRIC OPTICS - AS			
CCT. 3000K	lm	Led	mm
93AS6K3G	789	5.5W	287
93AS11K3G	1579	11W	537
93AS22K3G	2831	22W	1037
93AS33K3G	4609	33W	1537

WIDE BEAM OPTICS - WB			
CCT. 3000K	lm	Led	mm
93WB6K3G	780	5.5W	287
93WB11K3G	1406	11W	537
93WB22K3G	3094	22W	1037
93WB33K3G	4558	33W	1537

DOUBLE ASYMMETRIC OPTIC - DAS			
CCT. 3000K	lm	Led	mm
93DAS6K3G	771	5.5W	287
93DAS11K3G	1543	11W	537
93DAS22K3G	3059	22W	1037
93DAS33K3G	4506	33W	1537

CE

RETI LAP

5 YEARS WARRANTY

IP 67

IK 09

-20°

+55°

CRI>80

RGV/RG1

working load max 1000 kg

MacAdam 3

L90/B10 50.000h

24 V

On req.:

CODE K4

4000K

RGB

RGBW

Body


Anodized aluminium

Colours

RAL 7035

WALKABOUT / GROUND FC

For continuous row walk-over installation*.
Recessed box included.

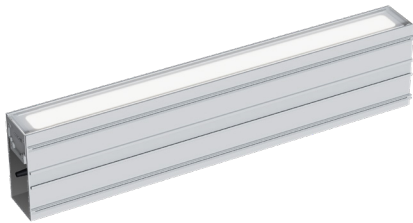

*Provide an element for single installation, with relative overall dimensions, at the end of the continuous row. Remote driver as accessory.

NARROW BEAM OPTICS - NB			
CCT. 3000K	lm	Led	mm
93NB6K3GFC	762	5.5W	278
93NB11K3GFC	1525	11W	528
93NB22K3GFC	3023	22W	1028
93NB33K3GFC	4454	33W	1528

ASYMMETRIC OPTICS - AS			
CCT. 3000K	lm	Led	mm
93AS6K3GFC	789	5.5W	278
93AS11K3GFC	1579	11W	528
93AS22K3GFC	2831	22W	1028
93AS33K3GFC	4609	33W	1528

WIDE BEAM OPTICS - WB			
CCT. 3000K	lm	Led	mm
93WB6K3GFC	780	5.5W	278
93WB11K3GFC	1406	11W	528
93WB22K3GFC	3094	22W	1028
93WB33K3GFC	4558	33W	1528

DOUBLE ASYMMETRIC OPTIC - DAS			
CCT. 3000K	lm	Led	mm
93DAS6K3GFC	771	5.5W	278
93DAS11K3GFC	1543	11W	528
93DAS22K3GFC	3059	22W	1028
93DAS33K3GFC	4506	33W	1528

CE

RETI LAP

5 YEARS WARRANTY

IP 67

IK 09

-20°

+55°

CRI>80

RG0/RG1

working load max 1000 kg

MacAdam 3

L90/B10 50.000h

24 V

On req.:
RAL CODE — D

CODE K4

4000K

RGB

RGBW

Body


Anodized aluminium

Colours

RAL 7035

WALKABOUT / DK

For single installation, with adjustable support.




Remote driver as accessory.

CCT. 3000K	lm	Led	mm
93DK5K3	598	5W 60°	310
93DK10K3	1196	10W 60°	590
93DK20K3	2392	20W 60°	1150
93DK30K3	3588	30W 60°	1710

WALKABOUT / GROUND DK

For single walk-over installation.
Recessed box included.

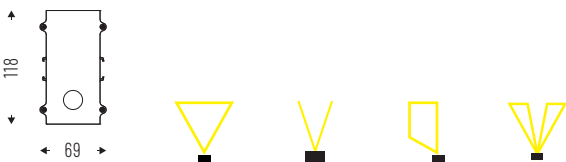

Remote driver as accessory.

CCT. 3000K	lm	Led	mm
93DK5K3G	598	5W 60°	321
93DK10K3G	1196	10W 60°	601
93DK20K3G	2392	20W 60°	1161
93DK30K3G	3588	30W 60°	1721

CE

RETI LAP

5 YEARS WARRANTY

IP 67

IK 09

-20°

+55°

CRI>80

RG0/RG1

working load max 1000 kg

MacAdam 3

L90/B10 50.000h

24 V

On req.:
RAL CODE — D

CODE K4

4000K

RGB

RGBW

Body

Anodized aluminium

Colours

RAL 7035

ACCESSORIES



Driver ON/OFF IP 67.

93LC3524IS67
93LC7524IS67
93LC10024IS67




Junction kit for walk-over recessed box.

93AA11CC



Removal kit for Walkabout Ground/FC.

93AATLCC



Plates kit for driver mounting on Walkabout/FC bar.

93AABD




ON/OFF driver with IP67 box for WALKABOUT DK

93LC7350IS67
93LC15350IS67
93LC32700IS67


TECHNICAL NOTES

GROUND INSTALLATION WITH WALKABLE OUTER CASING
FOR WALKABOUT GROUND AND WALKABOUT GROUND FC MODEL

DRIVER
INSERTION

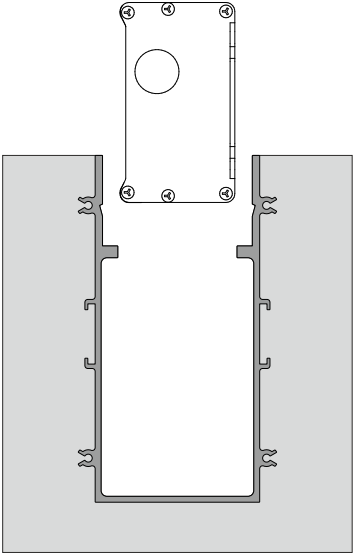

WALKABOUT GROUND
INSERTION

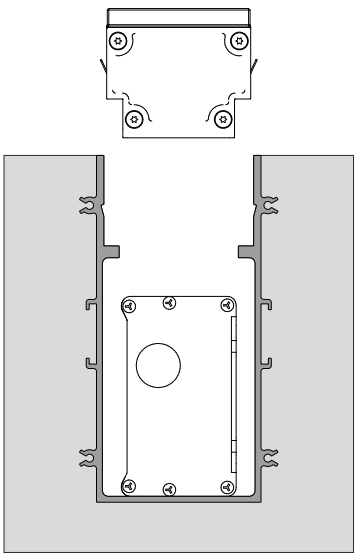

RECESSED BOX
INSTALLATION

