





PERIOD EXTE

Versatile, modern and efficient, PERIOD EXTE is a unique accent lighting fixture with minimal dimensions to facilitate freedom of use. It has beautiful aesthetic qualities and boasts all the benefits of the latest LED technology. PERIOD EXTE is ideal for use in a wide range of interior projects.

Design Serge & Robert Cornelissen.

Technical specifications at page 266

η	>100 lm/W	
UGR	<22	
CRI	>90	
IP	43	





PERIOD EXTE



Design
Serge & Robert
Cornelissen

DESCRIPTION

Versatile, modern and efficient, PERIOD EXTE is a unique accent lighting fixture with minimal dimensions to facilitate freedom of use. It has beautiful aesthetic qualities and boasts all the benefits of the latest LED technology.

Ceiling mounted, suspended or with EUtrack adaptor, and an impressive colour quality of CRI>90 (≤ 3 Macadam ellipse) PERIOD EXTE is ideal for use in a wide range of interior projects including demanding applications within retail, gallery and commercial projects.

A full 355° rotation and 70° tilt is possible.

Perfectly compliments PERIOD and PERIOD LOD products to enable the designer to complete a project creatively, no matter what the complexity.

SPECIFICATIONS

Driver included

Emission 32°

Colour temperature: 3000K/4000K

CRI>90

Mac Adams 3

Life Time: 60.000 h - 5 years complete warranty

Eye safety: risk-free (RG 0) in accordance with EN62471:2009

FLUX MAINTENANCE

CURRENT	L90/B10	L90/B50	L80/B10	L80/B50	L70/B10	L70/B50*
350mA	55.000h	60.000h	60.000h	60.000h	60.000h	60.000h

* E.g. L70 = guaranteed luminous flux of the entire luminaire 70%

B50 = 50% of the diodes may have a flux reduction below 70%

OPTICS

Medium beams optics: 32°

BODY

Polyester powder coated aluminum.

LEGAL REFERENCES

Conforms to EN 60598-1, CEI EN 60 598-1.

CERTIFICATIONS

CE IP 43

ErP class: A⁺

COLOURS


White RAL 9003 - Code: B

Stratos Grey - Code: C24


PERIOD EXTE

OPTIC

Available with lens 32°.
CRI>90

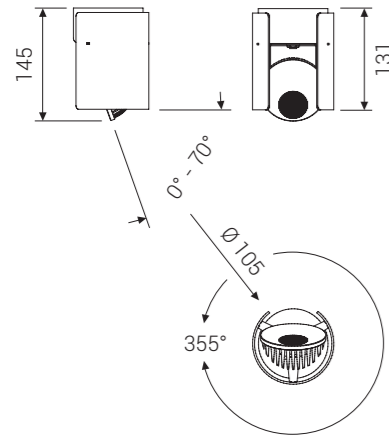

IP 43 A*

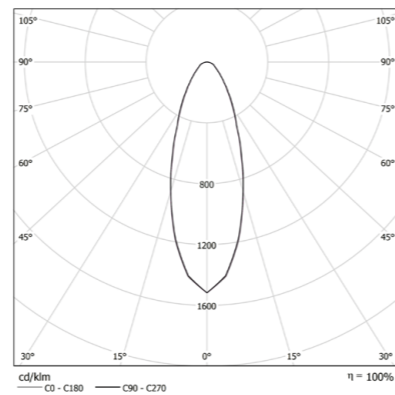

Medium beams optics: 32°.

COD	Icon	lm
30LM12L4P	optic 32° 12W 4000K	1434
30LM12L3P	optic 32° 12W 3000K	1270

ACCESSORIES



30AA13

Wire suspension kit for ceiling mounting with clutch operated adjustment mechanism and attachment bracket. Cable length 1500mm.



30AA14AB

3-circuit EUTrack adaptor.

TECHNICAL NOTE

CONE DIAGRAM

