

BOX LED is a line of architectural design luminaires for recessed installation, **entirely made of die-cast aluminum**. Available in **three sizes**, it offers an incredible **variety of powers** and lumen packages suitable for any type of environment. The innovative design of the recessed part allows unparalleled **ease of installation: BOX LED in fact fits into a round hole**, facilitating the installation and alignment phase.

☑ Features

- Direct emission
- UGR<19
- IP 54 visible side

💡 Led

- 3000K/4000K
- >100 lm/W, >130lm/W
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

🕒 Specifications

- SMD LED technology
- Internal reflector in white polycarbonate
- Diffuser in opal microprismatic polycarbonate
- Cut-off>20°

📏 Body

- Die-cast aluminum

🎨 Colors

- White RAL 9010 matte - code B
- Black RAL 9005 matte - code C8


🌟 Certifications

- CE Conformity
- Energy efficiency D
- 5 years warranty

📦 On request


- DALI - code D
- Bluetooth - code BT*
- Emergency 1 hr - code EM
- Emergency 3 hrs - code EM3H*

* Where available

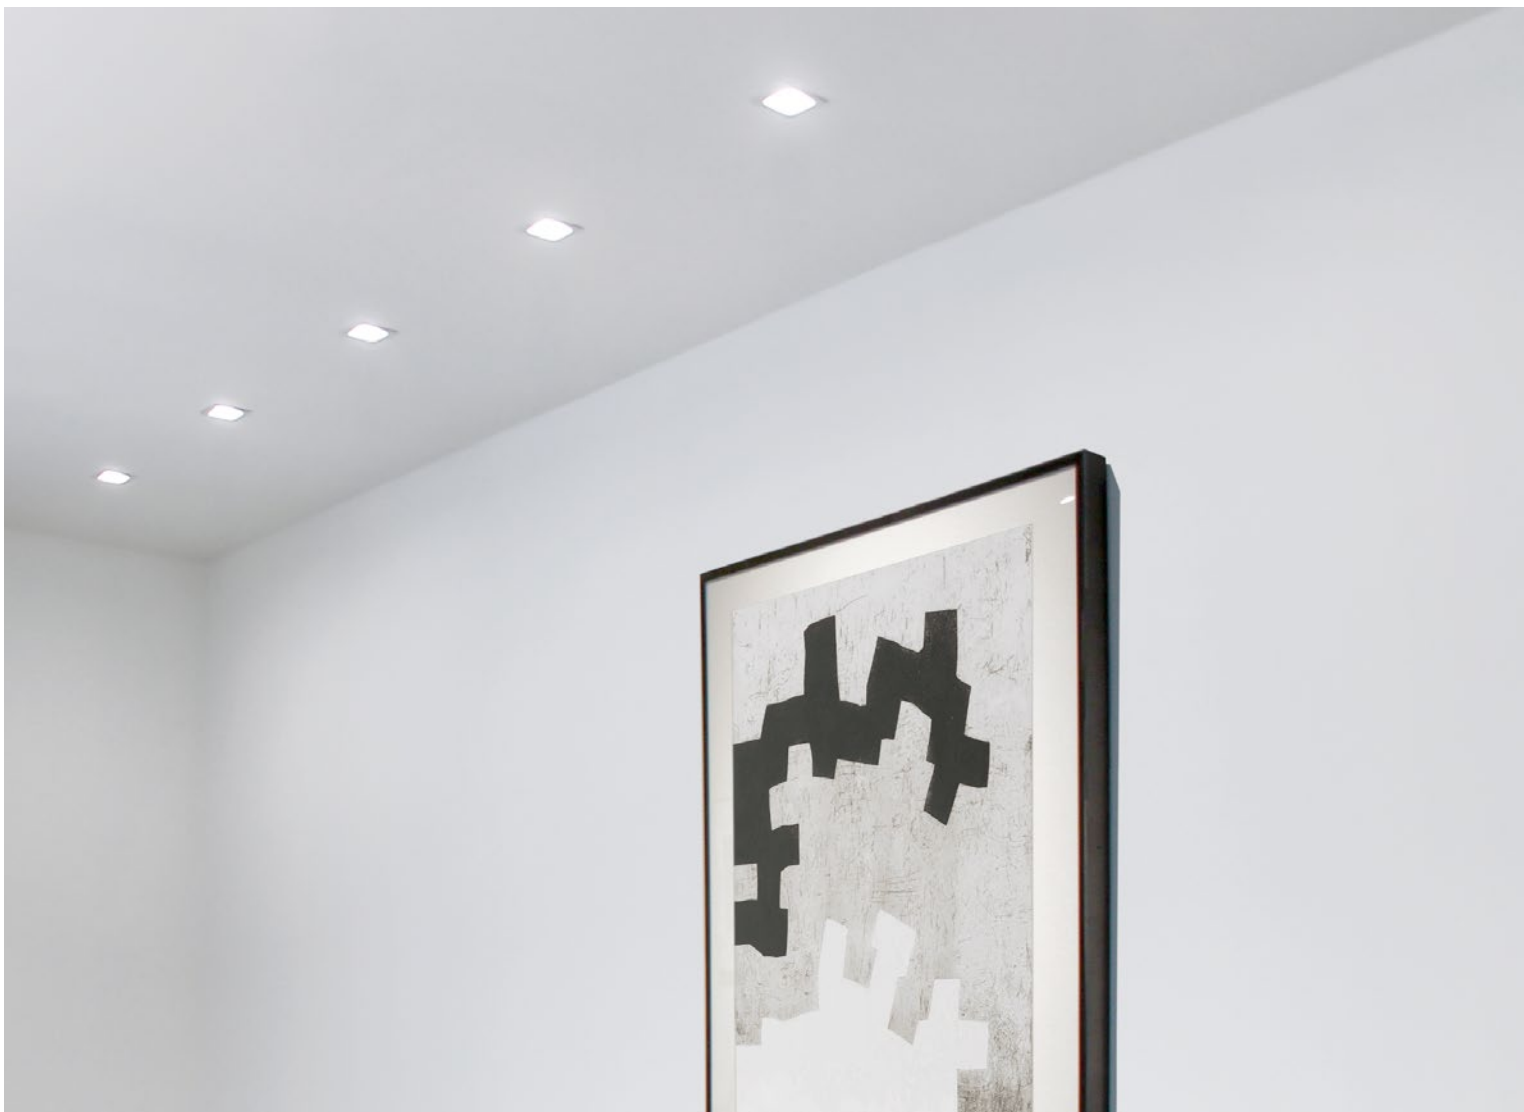

BOX LED MINI

Internal polycarbonate reflector and opal microprism polycarbonate diffuser.
Cut-off >20°.

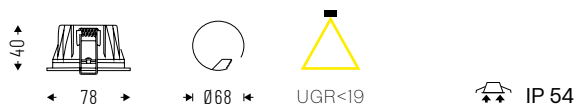


Cod. 4000K	Led	lm	Lmm
44MP7K454	7W	705	78
44MP10K454	10W	958	78

Cod. 3000K	Led	lm	Lmm
44MP7K354	7W	662	78
44MP10K354	10W	903	78

BOX LED SMALL

Internal polycarbonate reflector and opal microprism polycarbonate diffuser.
Cut-off >20°.

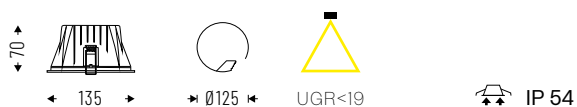


Cod. 4000K	Led	lm	Lmm
44MP14K4S54	14W	1605	135
44MP20K4S54	20W	2190	135
44MP28K4S54	28W	3080	135

Cod. 3000K	Led	lm	Lmm
44MP14K3S54	14W	1564	135
44MP20K3S54	20W	2132	135
44MP28K3S54	28W	2996	135

BOX LED MEDIUM

Internal polycarbonate reflector and opal microprism polycarbonate diffuser.
Cut-off >20°.

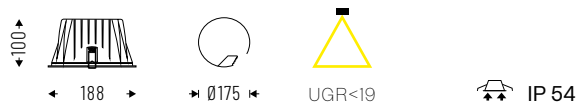

Cod. 4000K	Led	lm	Lmm
44MP20K4M54	20W	2469	188
44MP32K4M54	32W	3936	188
44MP48K4M54	48W	4469	188

Cod. 3000K	Led	lm	Lmm
44MP20K3M54	20W	2297	188
44MP32K3M54	32W	3680	188
44MP48K3M54	48W	4450	188

TECHNICAL NOTES

CIRCULAR CUT-OUT DIMENSIONS



Led	Ømm
7W-10W	68
14W-20W-28W	125
20W-32W-48W	175

