

## FEATURES

-  Direct emission
-  UGR <22
-  IP 67
-  IK 07 / IK 09
-  10 kN

## LED

-  3000K
-  >100lm/W
-  CRI >80
-  Eye safety: R60
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  Energy efficiency
-  5 years warranty

## ON REQUEST

-  DALI - code D\*
-  4000K - code K4\*  
RGB\* / RGBW\*

## SPECIFICATIONS

Remote driver.  
Back-screenprinted  
transparent cover glass.  
PMMA optics:  
Narrow Beam - code NB  
Wide Beam - code WB  
Asymmetrical - code AS  
Double asymmetrical - code DAS

## BODY

Anodized aluminum.

## COLORS

Grey RAL 7035



# WALKABOUT

**WALKABOUT** is the linear solution capable of **highlighting architectural shapes and textures**. Both in the walk-over version, recessed into the ground, and in the wall or ceiling version, it has the **highest degree of protection** (IP 67) while the special optics concentrate the luminous flux in a narrow beam, even in the asymmetric version. The possibility of connecting different length modules of **WALKABOUT** allows to create **continuous light lines**, both on the ground and on the façade, adapting to different architectural solutions **in the outdoor environment**.

ID 93



\* Where available


esse-ci

OUTDOOR IP

# WALKABOUT

IP 67 IK 07

For single installation,  
with adjustable support.



| NARROW BEAM OPTICS - NB |      |      |      |  |
|-------------------------|------|------|------|--|
| Cod. 3000K              |      | lm   | mm   |  |
| 93NB6K3                 | 5.5W | 681  | 276  |  |
| 93NB11K3                | 11W  | 1362 | 526  |  |
| 93NB22K3                | 22W  | 2724 | 1026 |  |
| 93NB33K3                | 33W  | 4087 | 1526 |  |

| ASYMMETRIC OPTICS - AS |      |      |      |  |
|------------------------|------|------|------|--|
| Cod. 3000K             |      | lm   | mm   |  |
| 93AS6K3                | 5.5W | 705  | 276  |  |
| 93AS11K3               | 11W  | 1410 | 526  |  |
| 93AS22K3               | 22W  | 2820 | 1026 |  |
| 93AS33K3               | 33W  | 4229 | 1526 |  |


| WIDE BEAM OPTICS - WB |      |      |      |  |
|-----------------------|------|------|------|--|
| Cod. 3000K            |      | lm   | mm   |  |
| 93WB6K3               | 5.5W | 697  | 276  |  |
| 93WB11K3              | 11W  | 1394 | 526  |  |
| 93WB22K3              | 22W  | 2788 | 1026 |  |
| 93WB33K3              | 33W  | 4182 | 1526 |  |

| DOUBLE ASYMMETRIC OPTIC - DAS |      |      |      |  |
|-------------------------------|------|------|------|--|
| Cod. 3000K                    |      | lm   | mm   |  |
| 93DAS6K3                      | 5.5W | 689  | 276  |  |
| 93DAS11K3                     | 11W  | 1378 | 526  |  |
| 93DAS22K3                     | 22W  | 2756 | 1026 |  |
| 93DAS33K3                     | 33W  | 4134 | 1526 |  |

# WALKABOUT<sup>FC</sup>

IP 67 IK 07

For continuous row installation\*  
with adjustable support.



| NARROW BEAM OPTICS - NB |      |      |      |  |
|-------------------------|------|------|------|--|
| Cod. 3000K              |      | lm   | mm   |  |
| 93NB6K3FC               | 5.5W | 681  | 276  |  |
| 93NB11K3FC              | 11W  | 1362 | 526  |  |
| 93NB22K3FC              | 22W  | 2724 | 1026 |  |
| 93NB33K3FC              | 33W  | 4087 | 1526 |  |

| ASYMMETRIC OPTICS - AS |      |      |      |  |
|------------------------|------|------|------|--|
| Cod. 3000K             |      | lm   | mm   |  |
| 93AS6K3FC              | 5.5W | 705  | 276  |  |
| 93AS11K3FC             | 11W  | 1410 | 526  |  |
| 93AS22K3FC             | 22W  | 2820 | 1026 |  |
| 93AS33K3FC             | 33W  | 4229 | 1526 |  |

| WIDE BEAM OPTICS - WB |      |      |      |  |
|-----------------------|------|------|------|--|
| Cod. 3000K            |      | lm   | mm   |  |
| 93WB6K3FC             | 5.5W | 697  | 276  |  |
| 93WB11K3FC            | 11W  | 1394 | 526  |  |
| 93WB22K3FC            | 22W  | 2788 | 1026 |  |
| 93WB33K3FC            | 33W  | 4182 | 1526 |  |


| DOUBLE ASYMMETRIC OPTIC - DAS |      |      |      |  |
|-------------------------------|------|------|------|--|
| Cod. 3000K                    |      | lm   | mm   |  |
| 93DAS6K3FC                    | 5.5W | 689  | 276  |  |
| 93DAS11K3FC                   | 11W  | 1378 | 526  |  |
| 93DAS22K3FC                   | 22W  | 2756 | 1026 |  |
| 93DAS33K3FC                   | 33W  | 4134 | 1526 |  |

\*Provide an element for single installation - with relative overall dimensions - at the end of the continuous row.

# WALKABOUT<sup>GROUND</sup>

IP 67 IK 09

For single walk-over installation.  
Recessed box included.

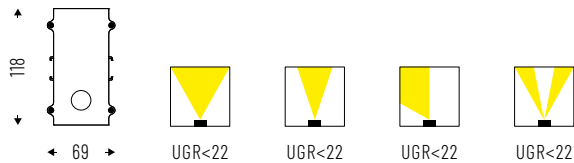

| NARROW BEAM OPTICS - NB |      |      |      |  |
|-------------------------|------|------|------|--|
| Cod. 3000K              |      | lm   | mm   |  |
| 93NB6K3G                | 5.5W | 681  | 287  |  |
| 93NB11K3G               | 11W  | 1362 | 537  |  |
| 93NB22K3G               | 22W  | 2724 | 1037 |  |
| 93NB33K3G               | 33W  | 4087 | 1537 |  |

| ASYMMETRIC OPTICS - AS |      |      |      |  |
|------------------------|------|------|------|--|
| Cod. 3000K             |      | lm   | mm   |  |
| 93AS6K3G               | 5.5W | 705  | 287  |  |
| 93AS11K3G              | 11W  | 1410 | 537  |  |
| 93AS22K3G              | 22W  | 2820 | 1037 |  |
| 93AS33K3G              | 33W  | 4229 | 1537 |  |


| WIDE BEAM OPTICS - WB |      |      |      |  |
|-----------------------|------|------|------|--|
| Cod. 3000K            |      | lm   | mm   |  |
| 93WB6K3G              | 5.5W | 697  | 287  |  |
| 93WB11K3G             | 11W  | 1394 | 537  |  |
| 93WB22K3G             | 22W  | 2788 | 1037 |  |
| 93WB33K3G             | 33W  | 4182 | 1537 |  |

| DOUBLE ASYMMETRIC OPTIC - DAS |      |      |      |  |
|-------------------------------|------|------|------|--|
| Cod. 3000K                    |      | lm   | mm   |  |
| 93DAS6K3G                     | 5.5W | 689  | 287  |  |
| 93DAS11K3G                    | 11W  | 1378 | 537  |  |
| 93DAS22K3G                    | 22W  | 2756 | 1037 |  |
| 93DAS33K3G                    | 33W  | 4134 | 1537 |  |

# WALKABOUT<sup>GROUND FC</sup>

IP 67 IK 09

For continuous row walk-over installation\*.  
Recessed box included.

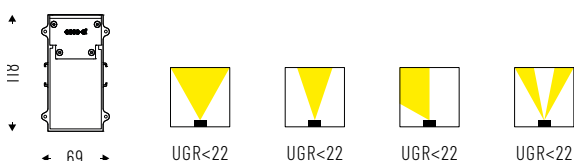

| NARROW BEAM OPTICS - NB |      |      |      |  |
|-------------------------|------|------|------|--|
| Cod. 3000K              |      | lm   | mm   |  |
| 93NB6K3GFC              | 5.5W | 681  | 278  |  |
| 93NB11K3GFC             | 11W  | 1362 | 528  |  |
| 93NB22K3GFC             | 22W  | 2724 | 1028 |  |
| 93NB33K3GFC             | 33W  | 4087 | 1528 |  |

| ASYMMETRIC OPTICS - AS |      |      |      |  |
|------------------------|------|------|------|--|
| Cod. 3000K             |      | lm   | mm   |  |
| 93AS6ASK3GFC           | 5.5W | 705  | 278  |  |
| 93AS11ASK3GFC          | 11W  | 1410 | 528  |  |
| 93AS22ASK3GFC          | 22W  | 2820 | 1028 |  |
| 93AS33ASK3GFC          | 33W  | 4229 | 1528 |  |

| WIDE BEAM OPTICS - WB |      |      |      |  |
|-----------------------|------|------|------|--|
| Cod. 3000K            |      | lm   | mm   |  |
| 93WB6K3GFC            | 5.5W | 697  | 278  |  |
| 93WB11K3GFC           | 11W  | 1394 | 528  |  |
| 93WB22K3GFC           | 22W  | 2788 | 1028 |  |
| 93WB33K3GFC           | 33W  | 4182 | 1528 |  |

| DOUBLE ASYMMETRIC OPTIC - DAS |      |      |      |  |
|-------------------------------|------|------|------|--|
| Cod. 3000K                    |      | lm   | mm   |  |
| 93DAS6K3GFC                   | 5.5W | 689  | 278  |  |
| 93DAS11K3GFC                  | 11W  | 1378 | 528  |  |
| 93DAS22K3GFC                  | 22W  | 2756 | 1028 |  |
| 93DAS33K3GFC                  | 33W  | 4134 | 1528 |  |

\*Provide an element for single installation - with relative overall dimensions - at the end of the continuous row.

## ACCESSORIES



ON/OFF Driver(IP 67)

93LC1324IS67  
93LC3524IS67  
93LC7524IS67  
93LC10024IS67



Junction kit for walk-over recessed box.

93AA11CC



Removal kit for Walkabout Ground / FC.

93AATLCC



Plates kit for Driver mounting on Walkabout / FC bar.


93AABD

## TECHNICAL NOTES




GROUND INSTALLATION WITH WALKABLE OUTER CASING  
FOR WALKABOUT GROUND AND WALKABOUT GROUND FC MODEL

DRIVER INSERTION

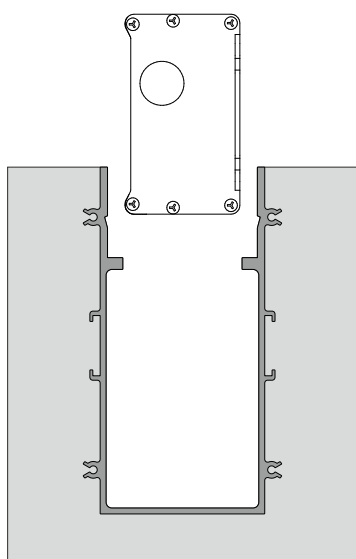

WALKABOUT GROUND INSERTION

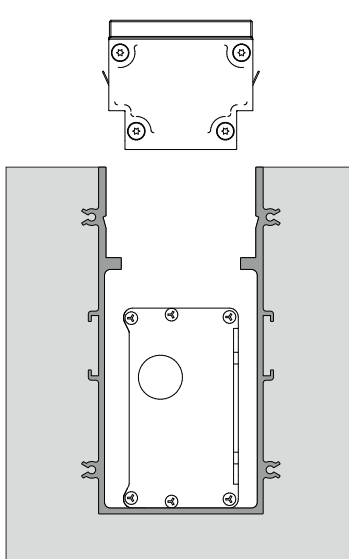

RECESSED BOX INSTALLATION

